

## Kerosene on ZB-5

**Column:** Zebtron™ ZB-5, GC Cap. Column 30 m x 0.53 mm x 1.50 μm, Ea

**Phase:** 5% Phenyl 95% Dimethylpolysiloxane

**Dimensions:** 30 meters x 0.53 mm x 1.5 μm

**Order No:** 7HK-G002-28

**Oven Profile:** 40°C for 5 min to 300°C at 4°C/min for 5 min.

**Carrier Gas:** Constant Flow Helium, 4.1 mL/min


**Injection:** split 30:1 1 μL @ 275°C

**Detection:** Flame Ionization (FID) (300°C)

14829



Products used in this application:

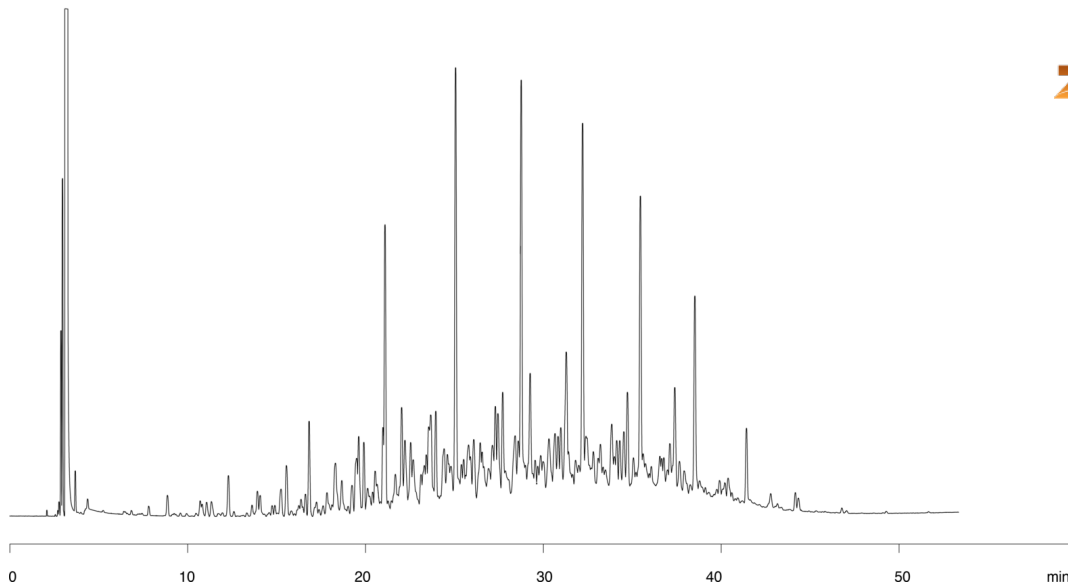

### ANALYTES:

- 1 Kerosene

