GC Application



Column:	Zebron™ ZB-5MS, GC Cap. Column 30 m x 0.25 mm x 0.25 µm, Ea
Phase:	5% Phenyl-Arylene 95% Dimethylpolysiloxane
Dimensions:	30 meters x 0.25 mm x 0.25 μm
Order No:	7HG-G010-11
Oven Profile:	225 °C to 330 °C @ 15 °C/min for 2 min.
Carrier Gas:	Constant Flow Helium, 2.5 mL/min
Injection:	Splitless :1 0.5 μL @ 320°C
Detection:	Flame Ionization (FID) (320°C)
Analyst Note	

Analyst Note: Sample prep- Saponification, Solid Phase Extraction (SPE), and Derivatization.




Ophenomenex

breaking with traditi

Products used in this application:



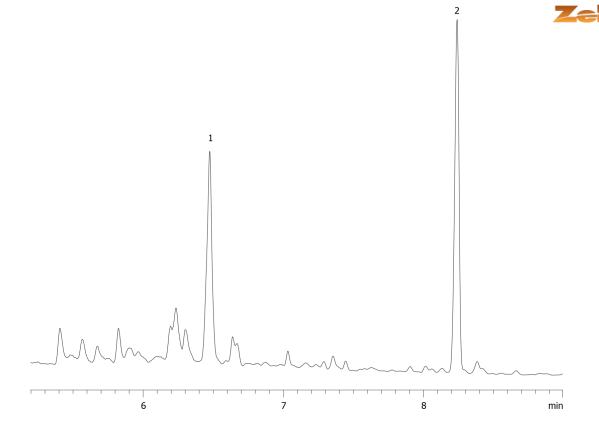

ANALYTES:

- Cholesterol 1
- 2 Betulin

©2025 Phenomenex Inc. All rights reserved.

Phenomenex products are available worldwide.

www.phenomenex.com.cn

For more information contact your Phenomenex Representative at info@phenomenex.com