


**Benzene and butanol by MSD on a ZB-5MSi (c)****Column:** Zebtron<sup>™</sup> ZB-5MSi, GC Cap. Column 30 m x 0.25 mm x 0.50  $\mu$ m, Ea**Phase:** 5% Phenyl 95% Dimethylpolysiloxane**Dimensions:** 30 meters x 0.25 mm x 0.5  $\mu$ m**Order No:** 7HG-G018-17**Oven Profile:** 30°C to 100°C at 20°C/min**Carrier Gas:** Constant Flow Helium, 55 cm/sec**Injection:** Split 50:1 1  $\mu$ L @ 250°C**Detection:** Flame Ionization (FID) (250°C)**Analyst Note:** Analytes are 50ppm in DMSO  
(Peaks coelute, not for view by sales)**Products used in this application:**

17686

**ANALYTES:**

- 1 Benzene
- 2 Butanol

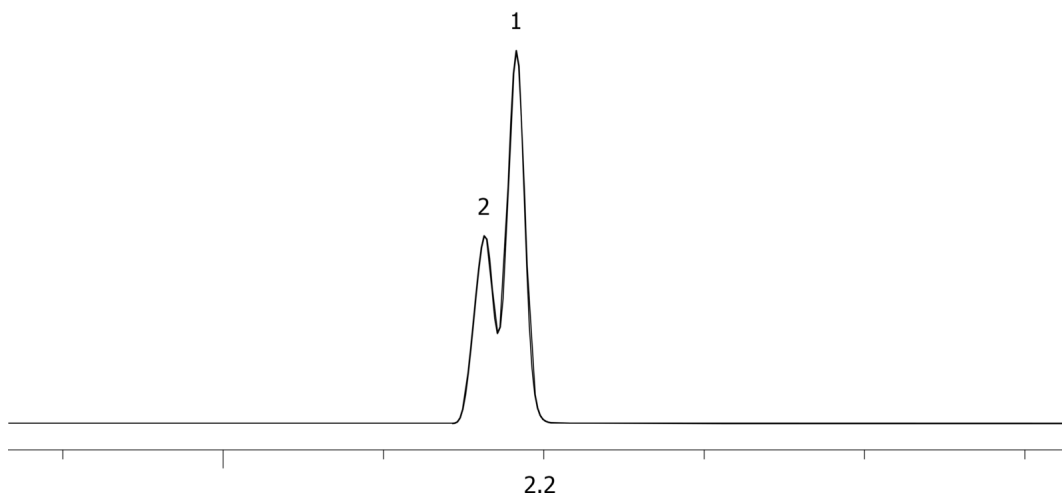