

Throughput - Kinetex 2.6µm C18 50 x 4.6mm ID (2.94 mL/min)

Column: Kinetex® 2.6 µm C18 100 Å, LC Column 50 x 4.6 mm, Ea

Dimensions: 50 x 4.6 mm ID

Order No: 00B-4462-E0

Elution Type: Gradient

Eluent A: water w/ 0.1% formic acid

Eluent B: acetonitrile w/ 0.1% formic acid

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
	1	0	95	5
	2	0.2	95	5
	3	2.47	5	95
	4	2.48	95	5
	5	3.47	95	5

Flow Rate: 2.94 mL/min


Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (25 °C)

18225



Products used in this application:

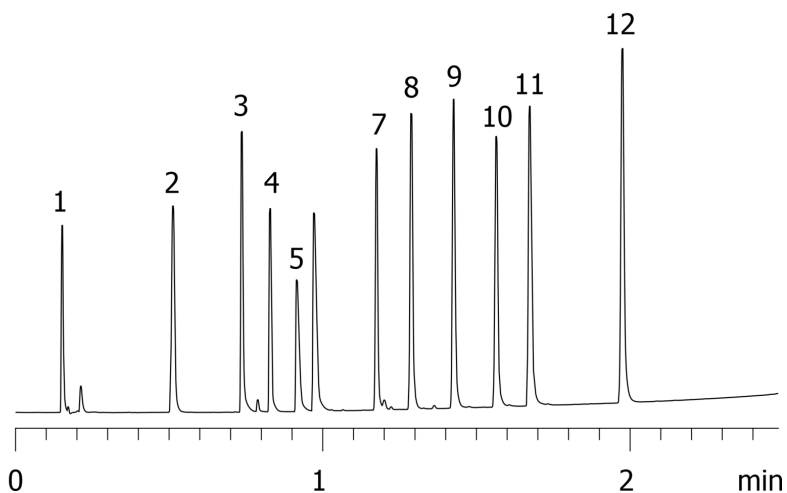

Throughput - Kinetex 2.6µm C18 50 x 4.6mm ID (2.94 mL/min)

ANALYTES:

- 1** Pyridine
- 2** Acetaminophen
- 3** Quinine
- 4** Acebutolol
- 5** Chlorpheniramine
- 6** Triprolidine
- 7** Prednisolone
- 8** 4-Chlorobenzoic acid
- 9** 4-Chlorocinnamic acid
- 10** Diazepam
- 11** Diflunisal
- 12** Hexanophenone

