

HPLC Application

ID No.: 18571

Ambucetamide Lux 5 μ Cellulose-2 in RP 80% MeOH

Column: Lux[®] 5 μ m Cellulose-2, LC Column 250 x 4.6 mm, Ea

Dimensions: 250 x 4.6 mm ID

Order No: 00G-4457-E0

Elution Type: Isocratic

Eluent A: Methanol

Eluent B: 20mM Ammonium bicarbonate + 0.1%DEA

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
	1	10	80	20

Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 220 nm (ambient)


Analyst Note: SecurityGuard[™] Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-2, 4 x 3.0mm ID, 10/Pk Part No.: AJ0-8366

- Holder Part No.: KJ0-4282



Products used in this application:

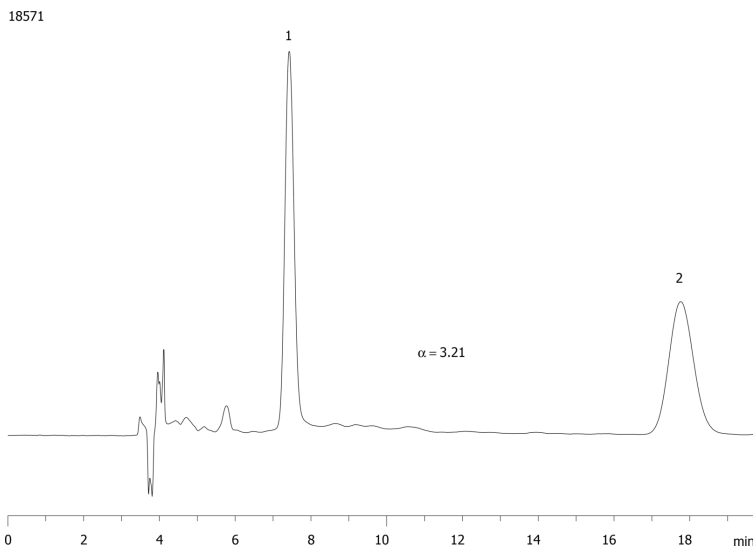

ANALYTES:

- 1** Ambucetamide
Retention Time: 7.43 min
- 2** Ambucetamide
Retention Time: 17.54 min