

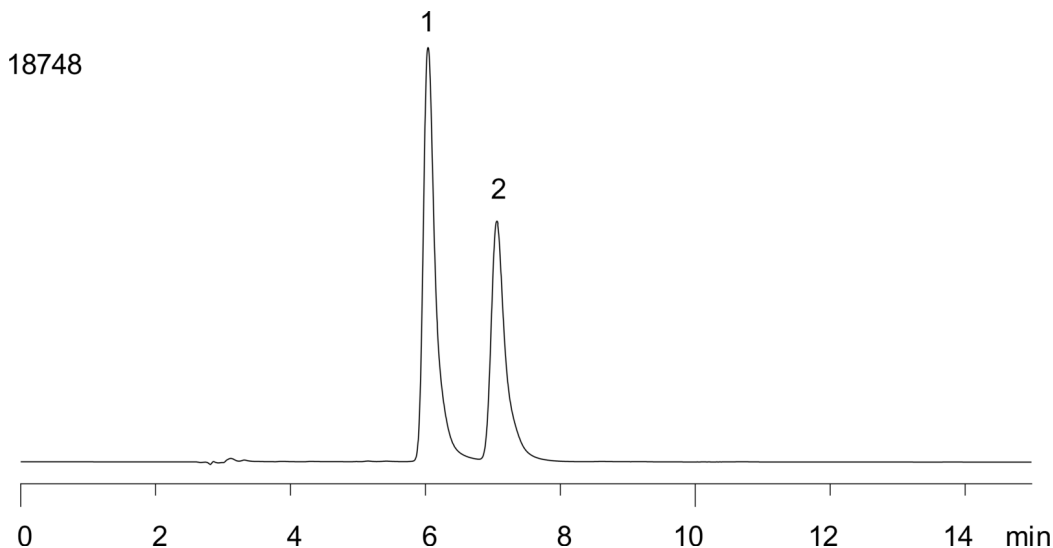
**FMOC-DL-Isoleucine-(boc)-OH on Lux 5 µm Cellulose-2 250 x 4.6mm in RP****Column:** Lux® 5 µm Cellulose-2, LC Column 250 x 4.6 mm, Ea**Dimensions:** 250 x 4.6 mm ID**Order No:** 00G-4457-E0**Elution Type:** Isocratic**Eluent A:** 0.1% TFA in CH<sub>3</sub>CN**Eluent B:** 0.1% TFA in Water

| Gradient | Step No. | Time (min) | Pct A | Pct B |
|----------|----------|------------|-------|-------|
| Profile: | 1        | 10         | 60    | 40    |

**Flow Rate:** 1 mL/min**Col. Temp.:** ambient**Detection:** UV-Vis Abs.-Variable Wave.(UV) @ 220 nm (ambient)**Analyst Note:** SecurityGuard™ Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-2, 4 x 3.0mm ID, 10/Pk Part No.: AJ0-8366

- Holder Part No.: KJ0-4282

**Products used in this application:****ANALYTES:**

- 1** FMOC-Ile-OH  
Retention Time: 6 min
- 2** FMOC-Ile-OH  
Retention Time: 7 min

