

Etosolin on Lux 5µ Cellulose-3 250 x 4.6mm in RP with 60%CH₃CN

Column: Lux® 5 µm Cellulose-3, LC Column 250 x 4.6 mm, Ea

Dimensions: 250 x 4.6 mm ID

Order No: 00G-4493-E0

Elution Type: Isocratic

Eluent A: 20mM NH₄HCO₃ + 0.1%DEA

Eluent B: CH₃CN

Gradient Profile:	Step No.	Time (min)	Pct A	Pct B
1	1	0	40	60

Flow Rate: 1 mL/min

Col. Temp.: 25 °C

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 220 nm (ambient)


Analyst Note: SecurityGuard™ Guard Cartridge System extends column lifetime.

- SecurityGuard Cartridges, Lux Cellulose-3 4 x 3.0 mm, 10/Pk Part No.: AJ0-8622

- Holder Part No.: KJ0-4282



Products used in this application:

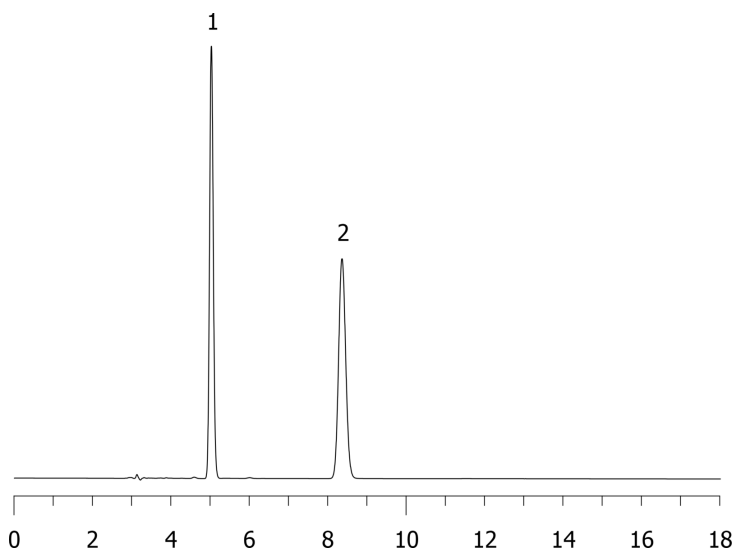

ANALYTES:

1 Etosolin

Retention Time: 5.58 min

2 Etosolin

Retention Time: 9.52 min

