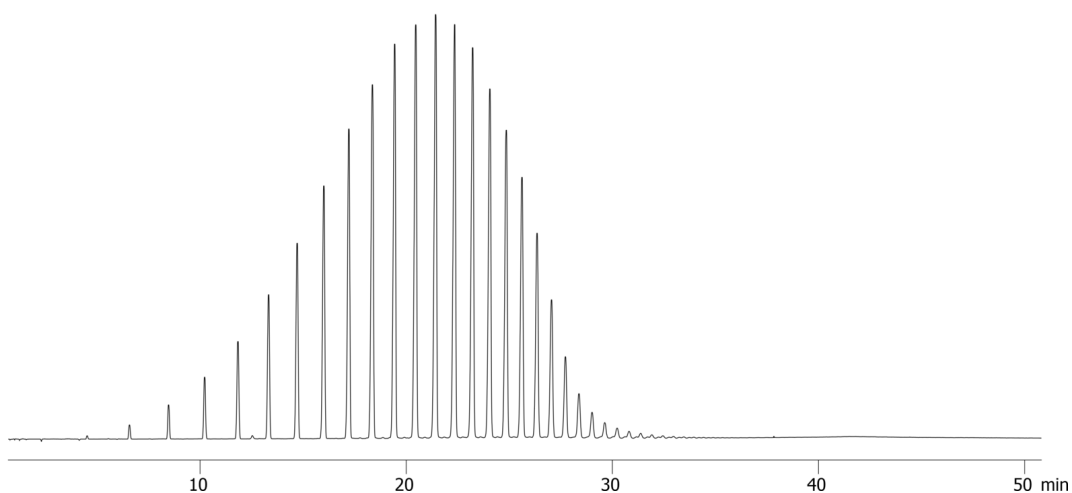


PolyWAX 500 on ZB-1XT 5x0.53x0.15**Column:** Zebron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.15 μ m, Ea**Phase:** 100% Dimethylpolysiloxane**Dimensions:** 5 meters x 0.53 mm x 0.15 μ m**Order No:** 7AK-G026-05**Oven Profile:** 35 °C to 450 °C @ 15 °C/min for 10 min**Carrier Gas:** Constant Flow Helium, 15 mL/min**Injection:** On-Column :1 1 μ L @ 38°C**Detection:** Flame Ionization (FID) (450°C)**Analyst Note:** Sample was 0.1% in CS₂. Chromatogram is baseline subtracted.

19258

**Products used in this application:****ANALYTES:****1** PolyWAX 500