GC Application ID No.: **19260**



PolyWAX 850 on ZB-1XT 5x0.53x0.15

Zebron™ ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.15 µm, Ea

Phase: 100% Dimethylpolysiloxane **Dimensions:** 5 meters x 0.53 mm x 0.15 μ m

Order No: 7AK-G026-05

Oven Profile: 35 °C to 450 °C @ 15 °C/min for 10 min

Carrier Gas: Constant Flow Helium, 15 mL/min Injection: On-Column :1 1 µL @ 38°C **Detection:** Flame Ionization (FID) (450°C)


Analyst Note: Sample was 0.1% in CS2. Chromatogram is baseline subtracted.

19260



Products used in this application:



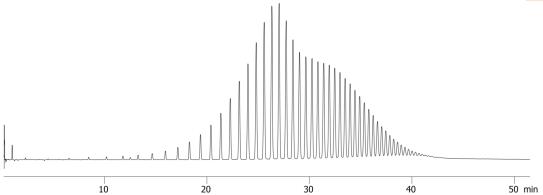

ANALYTES:

PolyWAX 850

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at info@phenomenex.com



Phenomenex products are available worldwide. www.phenomenex.com.cn