GC Application ID No.: **19263**



Diesel Fuel on ZB-1XT 5x0.53x0.15

Zebron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.15 μ m, Ea

Phase: 100% Dimethylpolysiloxane **Dimensions:** 5 meters x 0.53 mm x 0.15 μ m

Order No: 7AK-G026-05

Oven Profile: 30 °C to 450 °C @ 10 °C/min for 10 min

Carrier Gas: Constant Flow Helium, 7 mL/min Injection: On-Column :1 1 µL @ 33°C **Detection:** Flame Ionization (FID) (450°C)


Analyst Note: Sample was 1% in CS2. Chromatogram is baseline subtracted.

19263



Products used in this application:



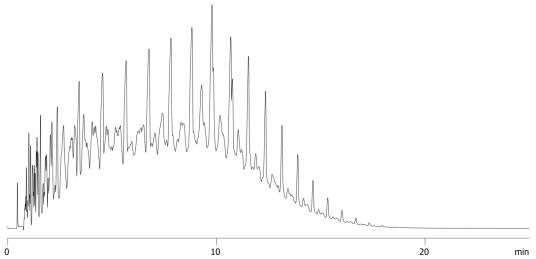

ANALYTES:

Diesel fuel

©2025 Phenomenex Inc. All rights reserved.

For more information contact your Phenomenex Representative at info@phenomenex.com



Phenomenex products are available worldwide. www.phenomenex.com.cn