

Desethyloxybutynin on Lux 5µm Cellulose-3 in RP

Column: Lux® 5 µm Cellulose-3, LC Column 250 x 4.6 mm, Ea

Dimensions: 250 x 4.6 mm ID

Order No: 00G-4493-E0

Elution Type: Isocratic

Eluent A: ACN / 5mM NH₄HCO₃ (40:60) None

Gradient	Step No.	Time (min)	Pct A
Profile:	1	0	100

Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 238 nm (ambient)

Analyst Note: SecurityGuard™ Guard Cartridge System extends column lifetime.


- SecurityGuard Cartridges, Lux Cellulose-3 4 x 3.0 mm, 10/Pk Part No.: AJ0-8622

- Holder Part No.: KJ0-4282

19640



Products used in this application:

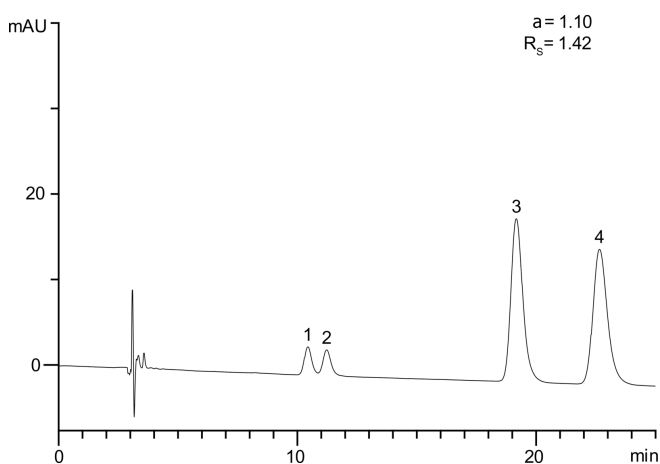

ANALYTES:

- 1** Desethyloxybutynin
Retention Time: 10.422 min
- 2** Desethyloxybutynin
Retention Time: 11.223 min
- 3** Desethyloxybutynin
Retention Time: 19.165 min
- 4** Desethyloxybutynin
Retention Time: 22.641 min

