

HPLC Application

ID No.: 19976

Column Guard Competitive Test: OptiGuard Guard on Kinetex 1.7 μ m XB-C18 50x2.1mm ID

Column: Kinetex[®] 1.7 μ m XB-C18 100 \AA , LC Column 50 x 2.1 mm, Ea

Dimensions: 50 x 2.1 mm ID

Order No: 00B-4498-AN

Elution Type: Isocratic

Eluent A: ACN

Eluent B: Water

| Gradient Profile: | Step No. | Time (min) | Pct A | Pct B |
|-------------------|----------|------------|-------|-------|
| | 1 | 0 | 50 | 50 |


Flow Rate: 0.5 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ nm (ambient)
19976



Products used in this application:

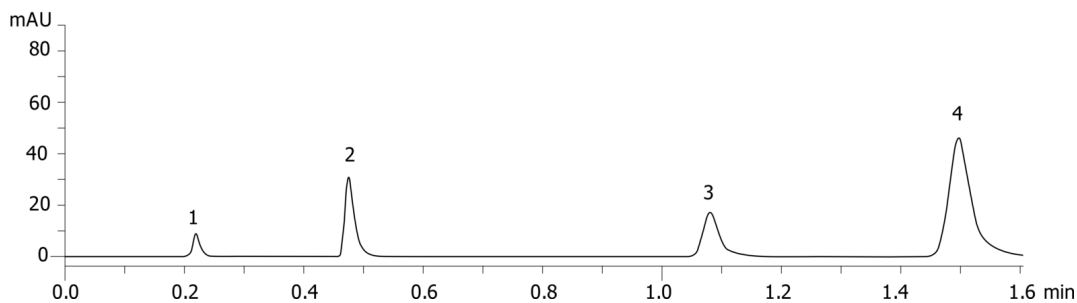

ANALYTES:

- 1 Acetophenone
- 2 Benzene
- 3 Toluene
- 4 Naphthalene

