

Polystyrene MW Standard on Phenogel 5u Linear(2) with SecurityGuard

Column: Phenogel™ 10 µm Linear(2), LC Column 300 x 7.8 mm, Ea

Dimensions: 300 x 7.8 mm ID

Order No: 00H-3260-K0

Elution Type: Isocratic

Eluent A: THF

Gradient	Step No.	Time (min)	Pct A
Profile:	1	0	100


Flow Rate: 1 mL/min

Col. Temp.: ambient

Detection: UV-Vis Abs.-Variable Wave.(UV) @ 254 nm (ambient)
22615



Products used in this application:

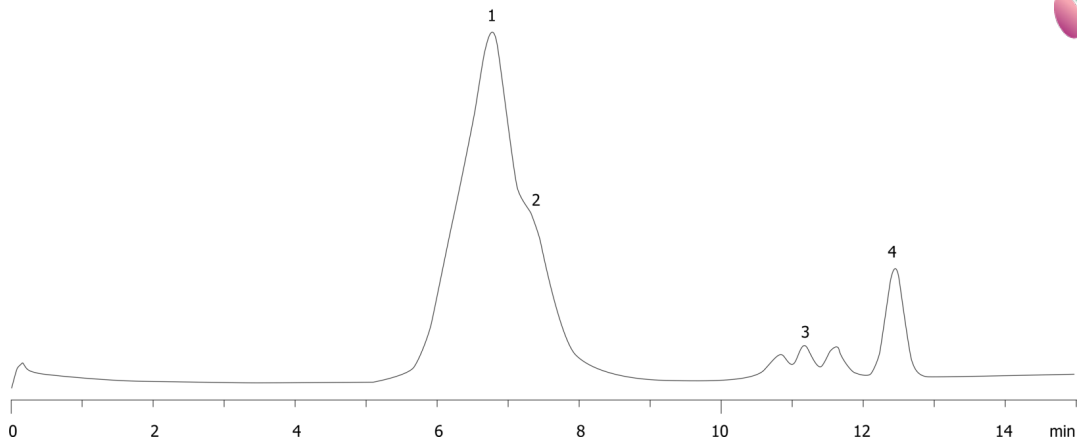

ANALYTES:

- 1 7000K
- 2 1970K
- 3 670K
- 4 277K

