

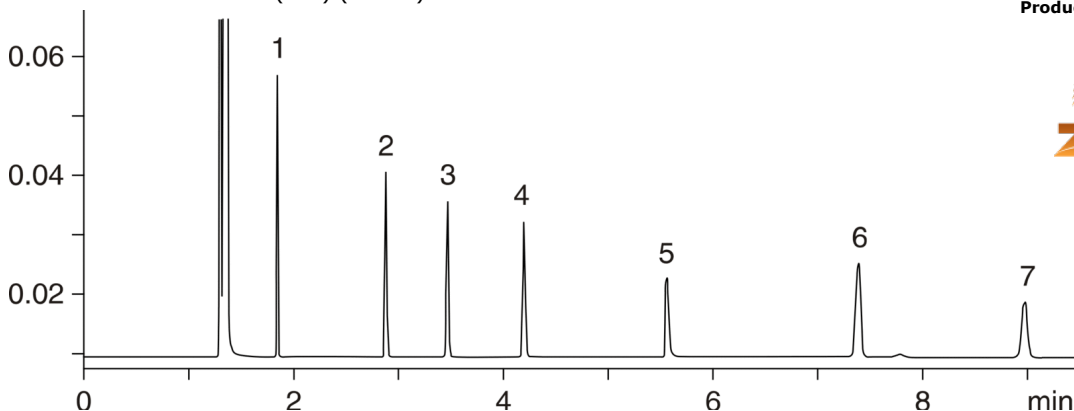
Test Conditions for Zebron ZB-50

Column: Zebron[™] ZB-50, GC Cap. Column 30 m x 0.25 mm x 0.25 μ m, Ea
Phase: 50% Phenyl 50% Dimethylpolysiloxane
Dimensions: 30 meters x 0.25 mm x 0.25 μ m
Order No: 7HG-G004-11
Oven Profile: 130°C Isothermal

Carrier Gas: Hydrogen, 1.18 mL/min
Injection: Split 100:1 1 μ L @ 250°C
Detection: Flame Ionization (FID) (325°C)



Products used in this application:

**ANALYTES:**

- 1 Undecane
- 2 Tridecane
- 3 2,4-Dimethylphenol
- 4 2,6-Dimethylaniline
- 5 1-Undecanol
- 6 1-Methylnaphthalene
- 7 Hexadecane (C16)

